

E77 Security Shutter

Applications

High security commercial sites & shopfront applications, up to 25M².
Note: The E77 & V77 can be upgraded to insurance approved "Secure By Design" status - LPS1175 SR2.

Punched (V77) or Perforated (P77) profile slats can be incorporated as required for full or partial vision. The V77 can have polycarbonate inserts to infill the punched section.

Curtain Slat

Double skinned extruded aluminium.
 Standard colours: White or Brown.

Note: The extruded E77 profile can be powder coated any colour as required.

Blind Surface: 77mm

Weight per m² 8.5kg

Maximum Width 6500mm

Maximum Surface 25m²

Enclosure

Manufactured from roll formed aluminium with a stove-enamelled finish.
 End caps are pressure moulded aluminium alloy.
 Standard colours: White or Brown. Other colours available on request.

Shutter height Box Size

| (mm) | (up to mm) |
|------|------------|
| 2700 | 300 |
| 4000 | 360 |
| 5000 | 400 |



Guide Channels / Bottom Slat

Extruded aluminium with weather seal.
 Guide channels depth is 90mm, 70mm or 150mm.
 Standard colours: White or Brown. Other colours available on request.

Operation

Electric: Single phase tubular motor & wall switch as standard.
 Numerous options such as group or remote control etc. Manual override facility as required.

Note: Manual operation is available but not common for the E77, V77 & P77 profiles as they are utilised for larger areas in most cases.

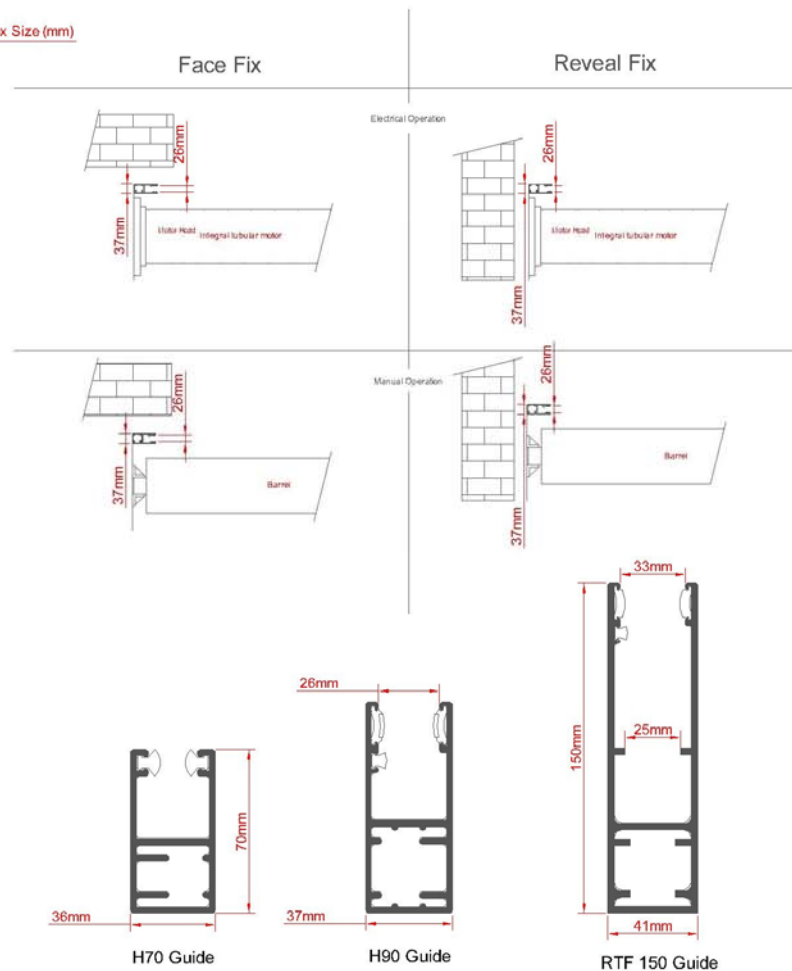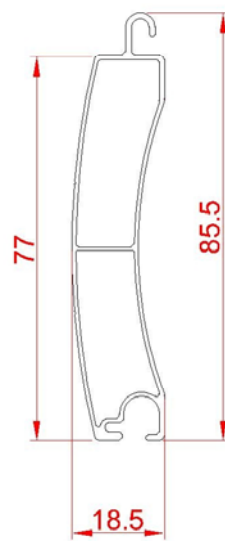

Aluroll,
 Mile Oak Industrial Estate, Maesbury Road,
 Oswestry, Shropshire,
 SY10 8GA

Telephone: 01691 679257
 Fax: 01691 671482