

M511 Security Shutter

Applications

Medium security domestic & low to medium security commercial sites, up to 13M².

Curtain Slat

Aluminium double skinned polyester powder coated slat with polyurethane foam insulating core. Vented or non-vented options. Standard colours: White, Brown, Beige, Silver. Other colours available on request.

Blind Surface: 55mm

Weight per m² 5.5kg

Maximum Width 5300mm

Maximum Surface 13m²

Housing

Manufactured from roll formed aluminium with a stove-enamelled finish in 2 sections with a 45° chamfered lid. Circular housing option. End caps are pressure moulded aluminium alloy. Standard colours: White or Brown. Other colours available on request.

Shutter Height (up to)	Box Size (mm)
1900	205
3000	250
3500	300




Guide Channels / Bottom Slat

Extruded aluminium with weather seal. Circular guide option. Guide channels depth is 75mm or 85mm. Standard colours: White or Brown. Other colours available on request.

Operation

Electric: Single phase tubular motor & wall switch as standard. Numerous options such as group or remote control etc. Manual override facility as required.

Note: Manual operation is available but not common for the M511 profile as it is utilised for larger areas in most cases.

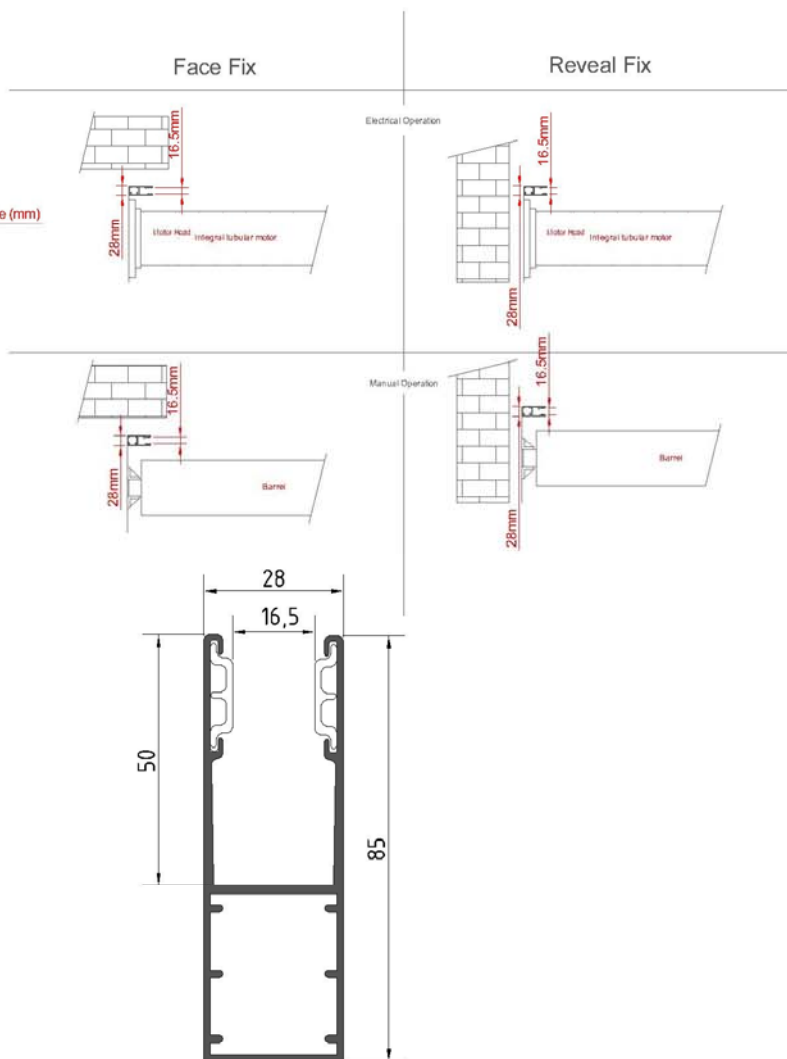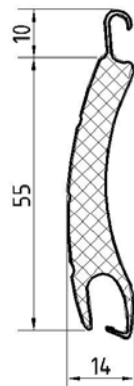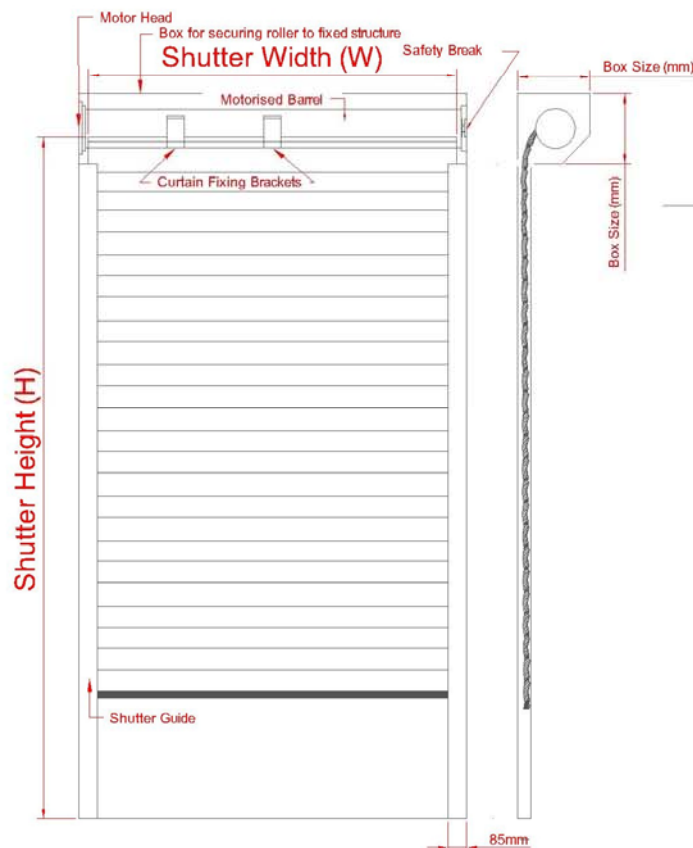

Aluroll,
Mile Oak Industrial Estate, Maesbury Road,
Oswestry, Shropshire,
SY10 8GA

Telephone: 01691 679257
Fax: 01691 671482