


Suitable for medium security domestic and commercial openings up to 9m². This shutter is designed for securing smaller openings, with the minimal headroom required. The T55 is a security shutter version of the Compact roller garage door, and therefore also offers maximum flexibility over colours and wood effect finishes.

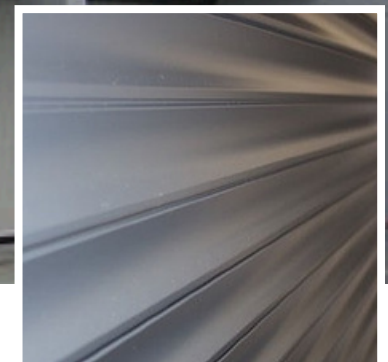

APPLICATIONS

Domestic and commercial sites requiring insulation and sound proofing.

This shutter type is also available as a high-performance remote-controlled garage door (see 'Compact Garage Door').

CURTAIN SLAT

Double-skinned aluminium slat with polyurethane foam insulating core.

Finish: Various standard colours available (See compact garage doors)

Laminate wood effect options available at a surcharge.

Visible Face:	52mm
Weight per m ² :	3kg
Maximum Width:	3000mm
Maximum Area:	9m ²
Maximum Height:	3000mm
Guide Width:	65mm
Slat U-Value:	2.2 W/m ² K

ENCLOSURE

Roll-formed aluminium box with pressure-moulded aluminium alloy end plates.

Finish: To match any standard slat colour, or traditional white or brown.

Guide Height (mm)

2195
2650

Plate Size (mm)

205
250

Plate sizes shown as a guide only and may vary.

BOTTOM SLAT

Extruded aluminium bottom slat with rubber weather seal.

GUIDE CHANNELS

Extruded aluminium guide channels with brush inserts. Width of 65mm.

Finish: To match any standard slat colour, or traditional white or brown.

OPERATION


Electric: Somfy tubular motor as standard. Safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies). Push button operation as standard, with numerous control option variants such as key switch, remote and group or mobile phone activation.

Manual Cord Belt: A swivel winder coils the belt within a compact box.


Manual Spring & Lock: A counter-balanced spring assembly with a key-lock bottom slat & handles.

CE compliant to all applicable directives and standards.


FRONT FACE

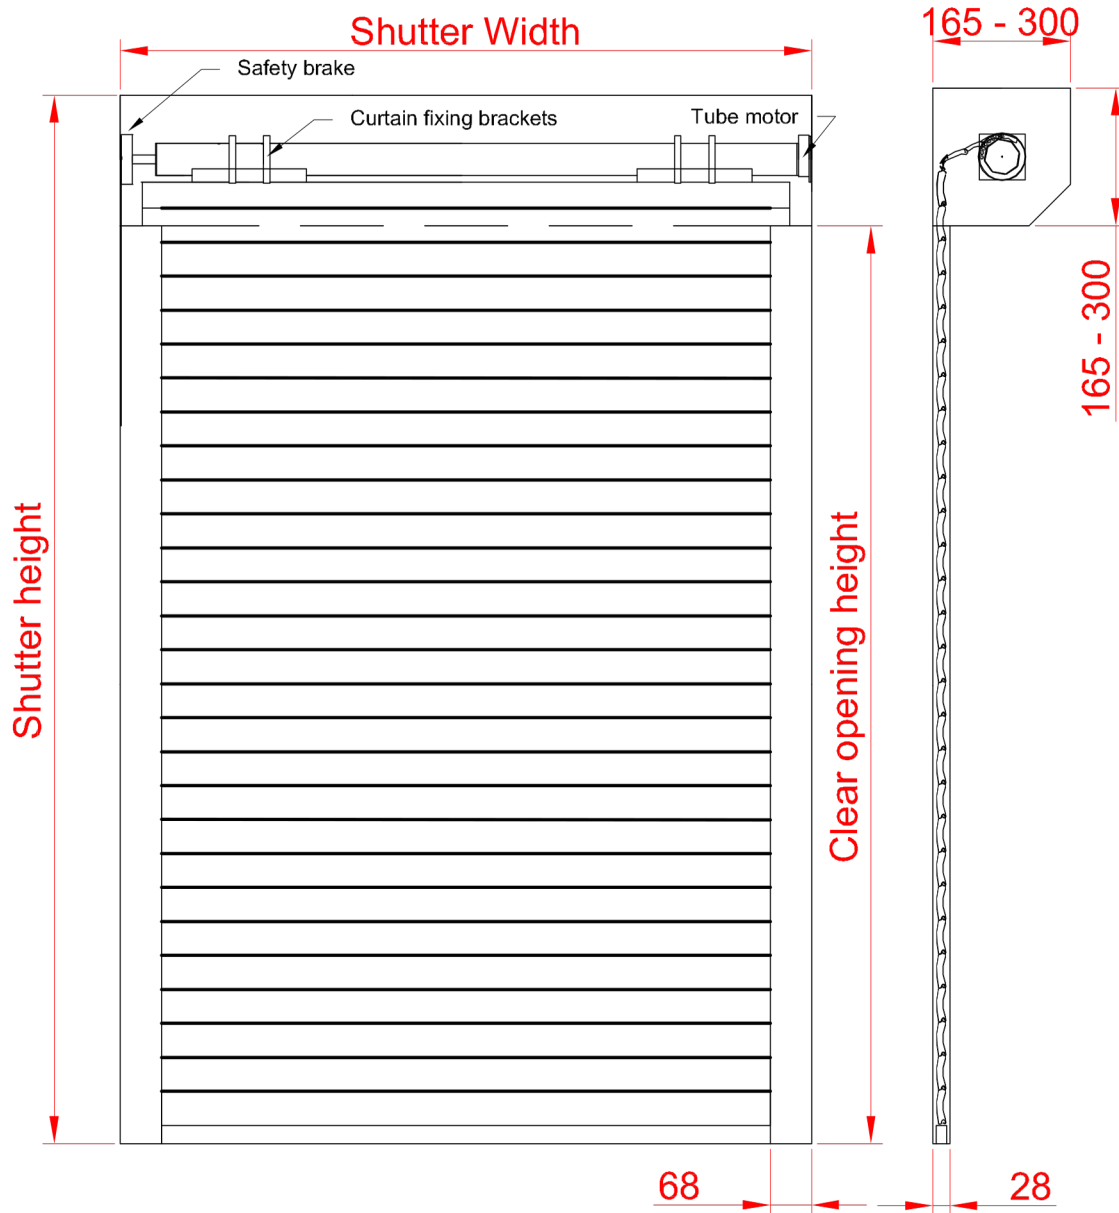

FIXING DETAIL

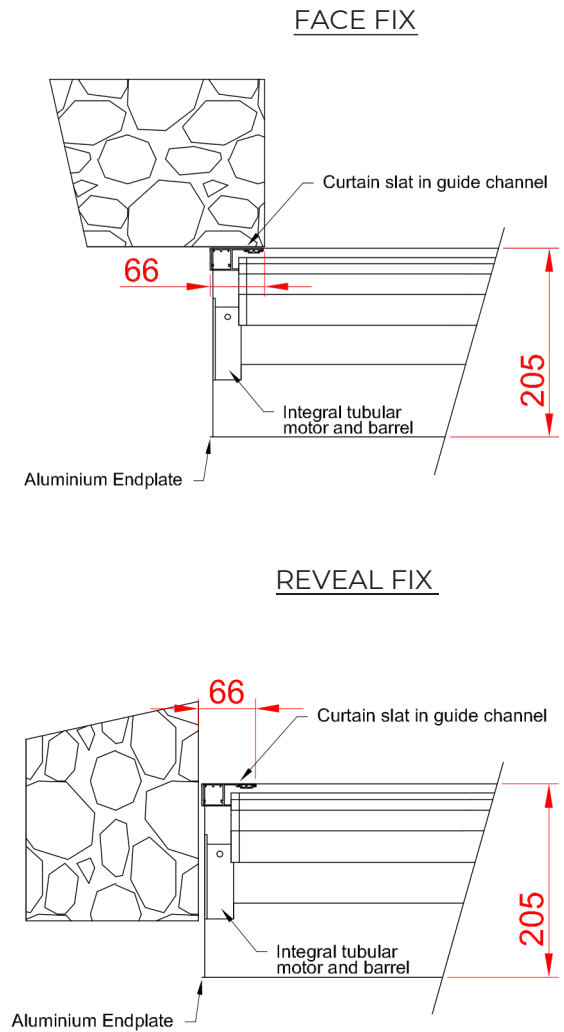

SLAT PROFILE

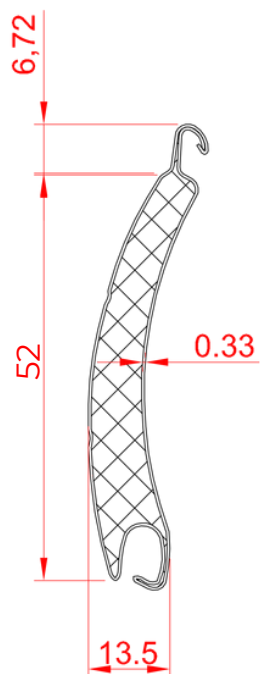

GUIDE CHANNELS

