

Suitable for medium security domestic and commercial openings up to 9m². This shutter is designed for securing smaller openings, with the minimal headroom required. The T55 is a security shutter version of the Compact roller garage door, and therefore also offers maximum flexibility over colours and wood effect finishes.



APPLICATIONS

Domestic and commercial sites requiring insulation and sound proofing.

This shutter type is also available as a high-performance remote-controlled garage door (see 'Compact Garage Door').

CURTAIN SLAT

Double-skinned aluminium slat with polyurethane foam insulating core.

Finish:

18 colours as standard

Visible Face:	52mm
Weight per m ² :	3kg
Maximum Width:	3000mm
Maximum Area:	9m ²
Maximum Height:	3000mm
Guide Width:	65mm 75mm
Slat U-Value:	2.2 W/m ² K

BOX

Roll-formed aluminium box with pressure-moulded aluminium alloy end plates.

Finish: To match any standard solid colour, or traditional brown.

Guide Height (mm)

2195
2650

Plate Size (mm)

205
250*

*75mm guide is used on 250 box/plate

Plate sizes shown as a guide only and may vary.

BOTTOM SLAT

Extruded aluminium bottom slat with rubber weather seal.

GUIDE CHANNELS

Extruded aluminium guide channels with brush inserts. Width of 65mm or 75mm.

Finish: To match any standard slat colour, or traditional brown.

OPERATION

ELECTRIC:

Powered by a Somfy non-override tubular motor as standard. An Aluroll tubular motor option is available.
Manual override and crank handle can be added to this shutter if required. Supplied as standard with a choice of rocker switch or key switch controls.

Alternative operating options are available, including wireless switches, hand-held transmitters and Building Management Systems (BMS) integration.

A safety break is fitted where required to ensure compliance with current legislation.


MANUAL CORD & BELT:

Manually operated by a corded belt & box


MANUAL SPRING & LOCK:

Counterbalance spring-assisted operation with locking bottom slat and integrated handles


FRONT FACE

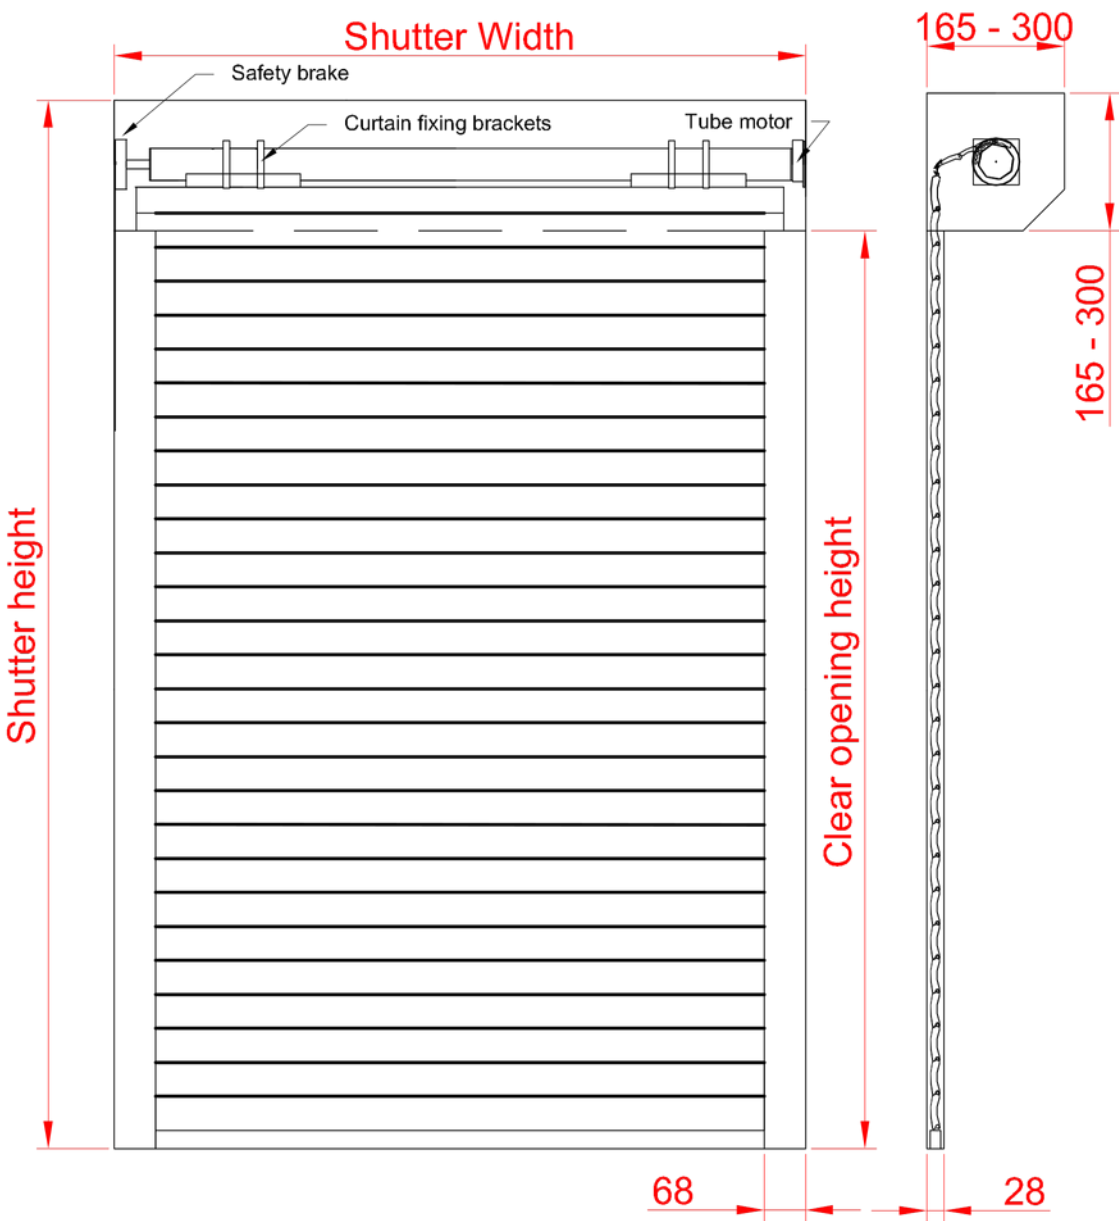

FIXING DETAIL

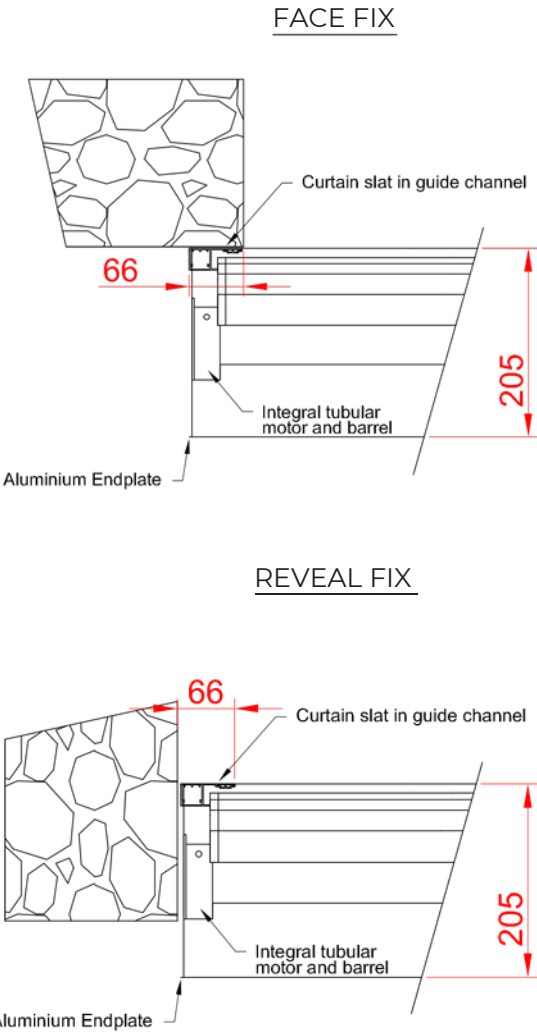

SLAT PROFILE

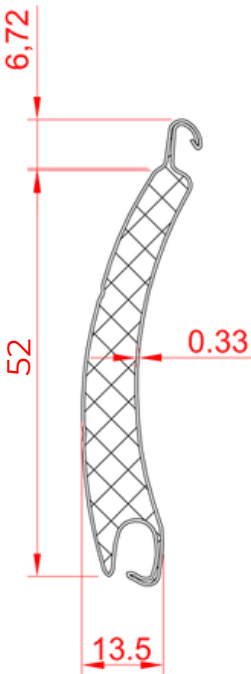

GUIDE CHANNELS

