


# Visi Elite 1 (A1/SR1) & Visi Elite 2 (B3/SR2)



## MAXIMUM VISION SHUTTER : TECHNICAL DATASHEET 22

The Visi Elite 1 & Visi Elite 2 are high security shutters designed to provide excellent visibility and airflow even when fully closed, making them the ideal solution for retail environments that require both protection and display.

These shutters have been independently tested and approved by the Loss Prevention Certification Boards (LPCB) to achieve A1 (SR1) - Visi Elite 1 and B3 (SR2) - Visi Elite 2.

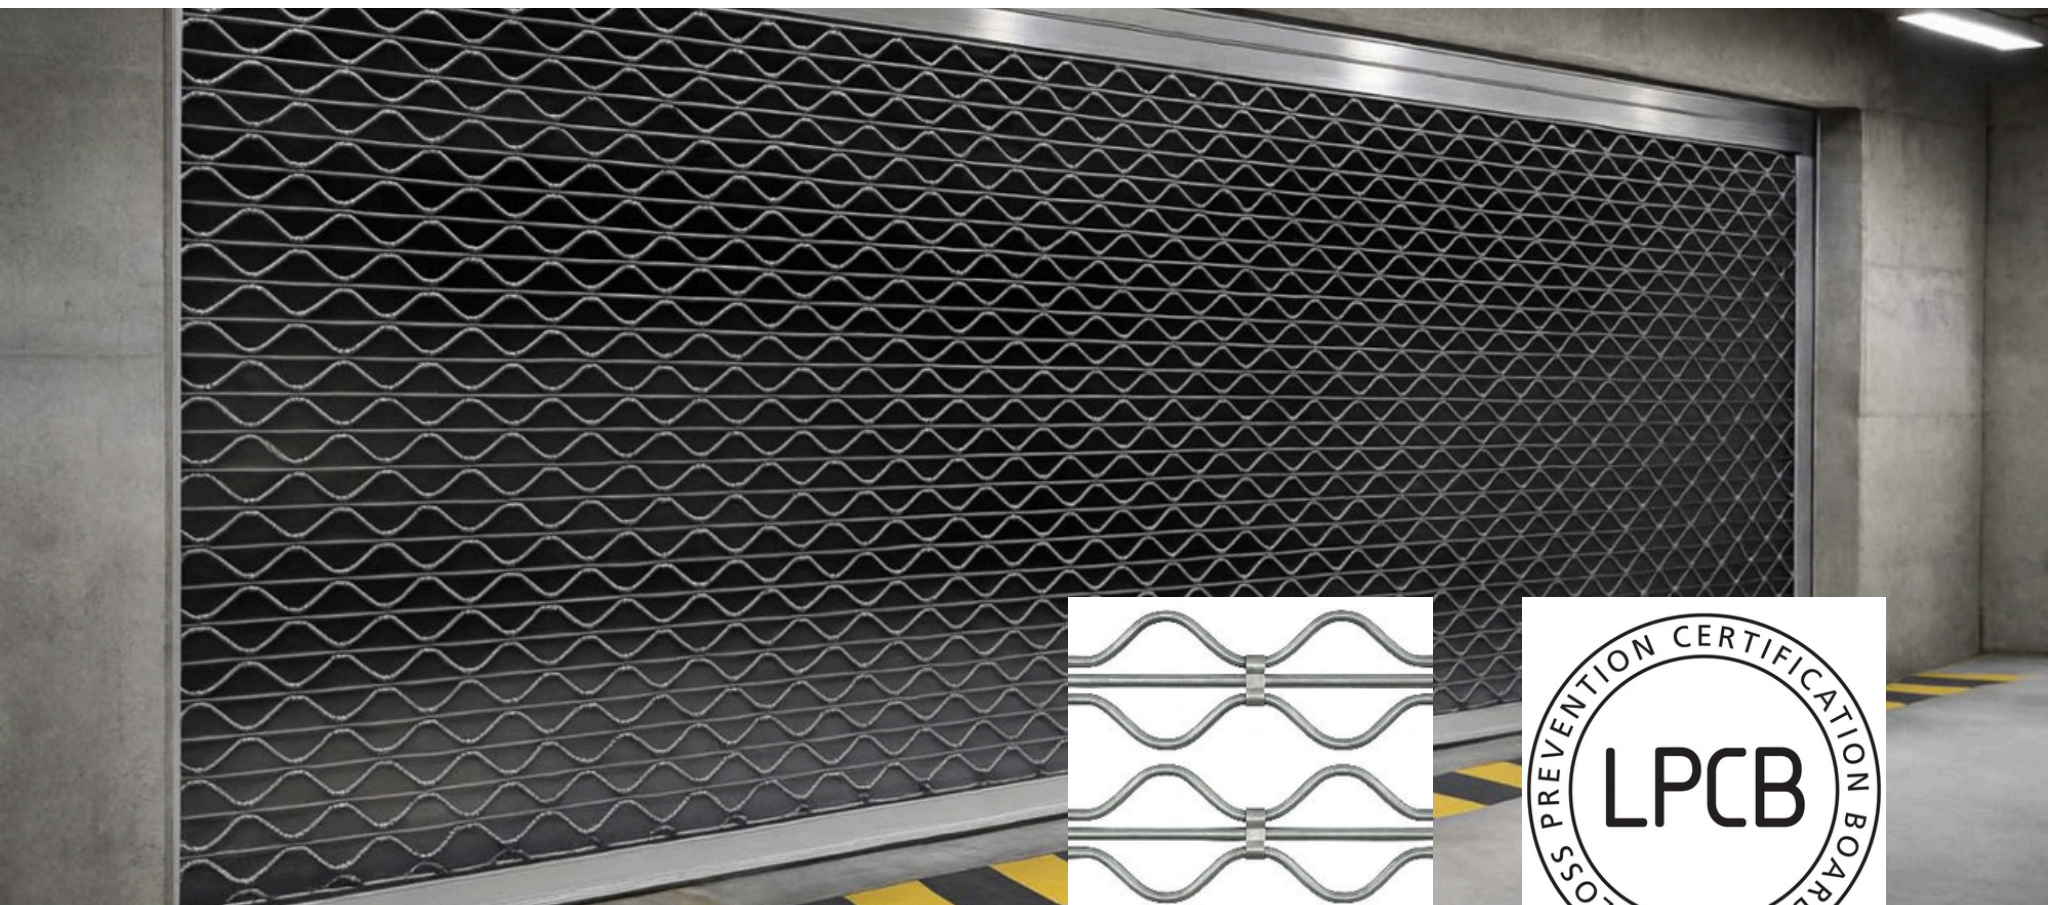

### APPLICATIONS

High security shutters suitable for retail shop fronts & car parks, providing up to 72% vision and airflow & contains a self locking system for added security.

Both shutters have been tested and approved by the Loss Prevention Certification Board (LPCB) tested to LPS 1175 Issue 8 standard.

The Visi Elite 1 is rated A1/SR1 and the Visi Elite 2 is rated B3/SR2

Suitable for internal face or reveal fit.

### CURTAIN SLAT

14mm steel tubes, set in a honeycomb formation.

The Visi Elite 2 combines additional anti-cut technology to reach a higher LPCB rating (B3/SR2)

**Finish:** Powder coated to any RAL / BS colour (surcharges apply).

Visible Face:	14mm steel tubes in a honeycomb formation
Weight per m <sup>2</sup> :	12.8kg/m <sup>2</sup> (A1), 22kg/m <sup>2</sup> (B3)
Maximum Width:	7920 mm
Maximum Area:	39.6 m <sup>2</sup>
Maximum Height:	5000mm
Guide Width:	100 mm

\*Larger sizes are available on request

### CASING

Mild steel end plates as standard with optional casing / fascia depending on fit type.

N.B. Reveal fix installations are supplied with a fascia as standard.

**Finish:** Powder coated to any RAL / BS colour (surcharges apply).

### BOTTOM SLAT

U channel with 'L' shaped angle.

### GUIDE CHANNELS

100mm steel guide channels

**Finish:** Powder coated to any RAL / BS colour (surcharges apply).

### OPERATION

**Tubular Motor:** With internal rocker switch or external key switch on hold to run operation only and safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies).

**Direct Drive Motor:** Single or three phase motor with integrated safety brake, chain manual override and push button control station as standard.

**Inboard Motor:** GfA Ranger single or three phase motor with separate safety brake, chain manual override and push button control station as standard. Single phase motor available as an optional extra.

Other motors and operator brands available on request. Numerous control option variants such as key switch, remote and group or mobile phone activation.




# Visi Elite 1 (A1/SR1) & Visi Elite 2 (B3/SR2)




## MAXIMUM VISION CAR PARK SHUTTER : TECHNICAL DATASHEET 22


### TUBULAR MOTOR

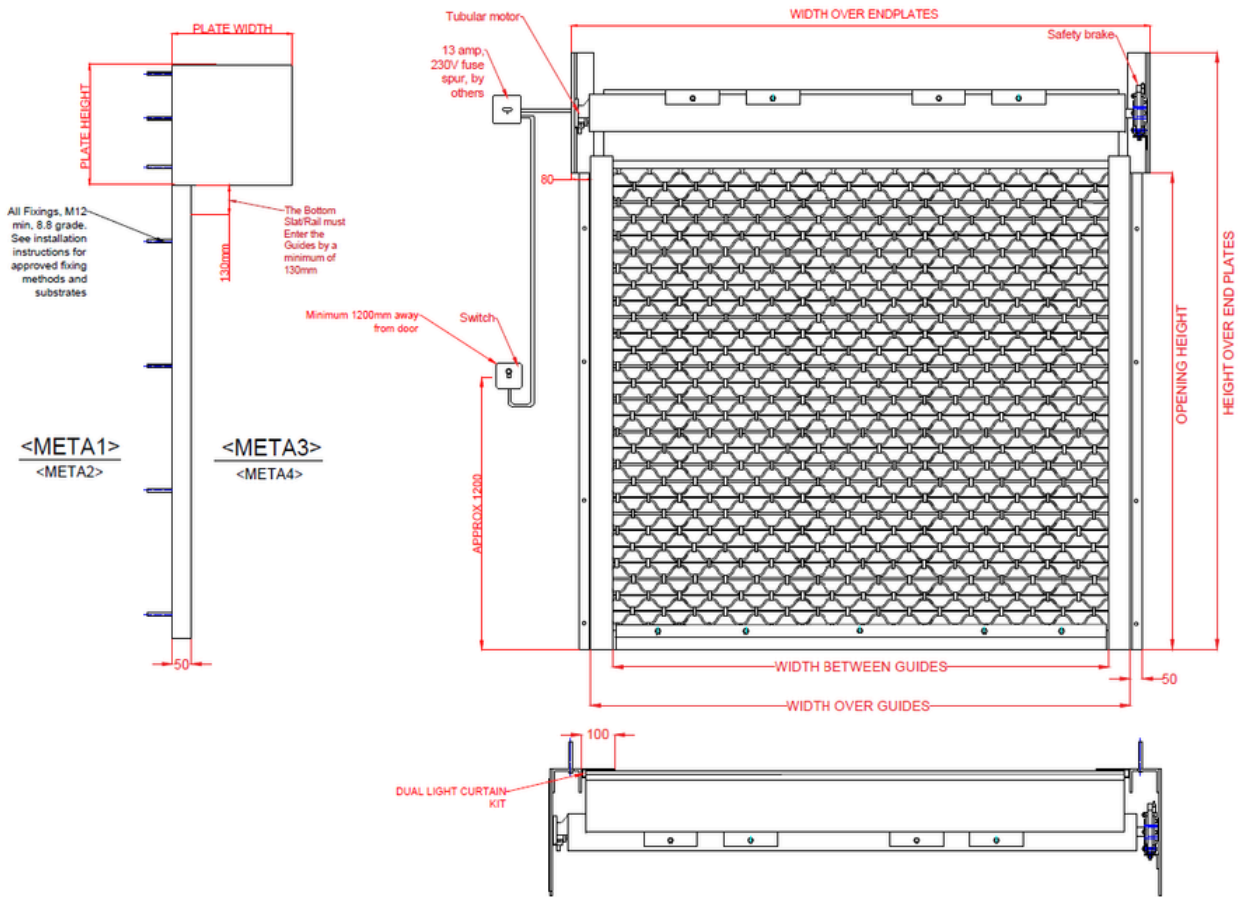

### DIRECT DRIVE MOTOR

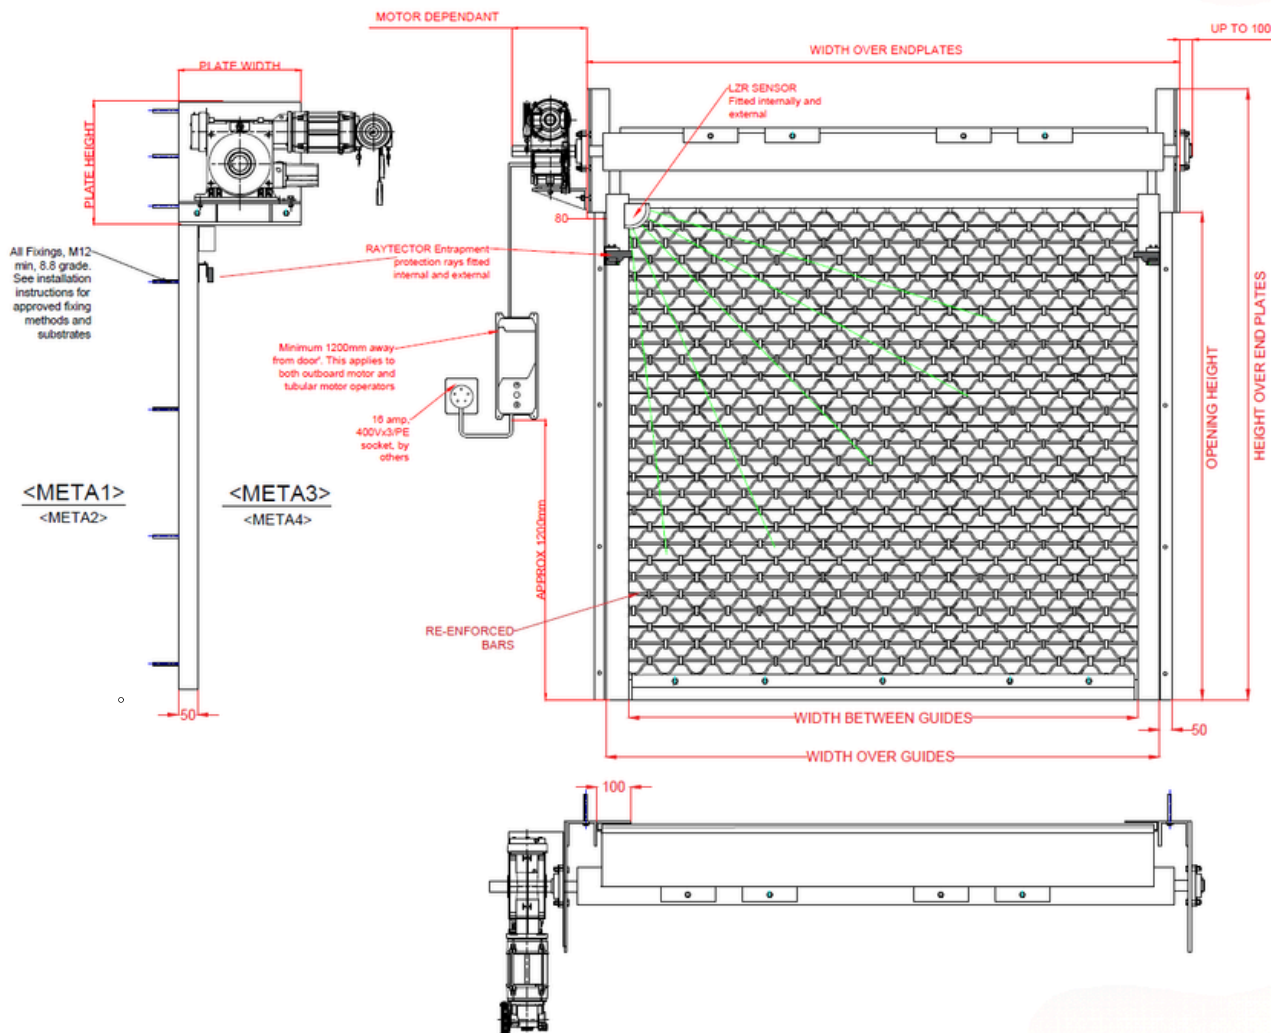


### SLAT PROFILE

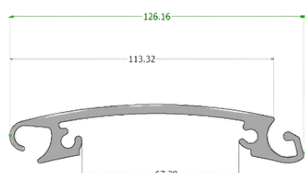


### GUIDE CHANNELS

Reveal Fix



Internal Face Fix

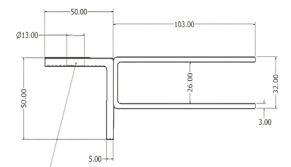

Manufactured by Aluroll

Unit 12 Artillery Business Park, Garrison Avenue, Park Hall, Oswestry, Shropshire, SY11 4AD :: Tel: 01691 679257

[www.aluroll.co.uk](http://www.aluroll.co.uk)